





Parabolic Dish Antenna 5 GHz Operation

Features

- High Gain 28 dBi, 29 dBi Antenna (2 Frequency Ranges Available)
- Adjustable tilt pole mount
- Vertical or Horizontal Polarization
- Type N Female Connector
- DC Grounded for lightning protection
- Rugged, Lightweight and Waterproof

Applications

- 5.8 GHz ISM Band Applications
- 5.3GHz UNII Band Applications
- Point to Point Data Links

- 802.11a Wireless Data
- Long Distance Backhaul Data Links
- Building to Building High Speed Links



Description

The Parabolic Dish Antenna systems offered by Pacific Wireless are constructed of an aluminum alloy dish with powder coat paint finish for excellent mechanical, electrical and environmental performance. The parabolic reflector is made with a special one-step molding technology which achieves excellent consistency and long term stability. They come complete with universal galvanized steel, powder coat paint mounting system for pole mount applications. Because of its' superb electrical performance and mechanical stability, the parabolic dish antenna can be used in a wide variety of high performance 5GHz wireless applications. An optional Fiberglass Radome is available for added environmental protection.

Specifications

Parameter		Min	Typ	Max	Units
Frequency Range	DA58	5725		5850	MHz
	DA57	5470		5725	
	DA53	5150		5350	
Gain	DA58		29		dBi
	DA57		28		
	DA53		28		
Input Return Loss (S ₁₁)			-14		dB
VSWR			1.5:1		
3db Beam Angle			6		Deg
Cross Pole			-32		dB
Front to Back		25			dB
Side Lobe			-28		dB
Impedance			50		ОНМ
Input Power				100	W
Pole Diameter (OD)		1.5 (38)		3.0 (76)	Inch (mm)
Operating Temperature		-40		+70	Deg C
Rated Wind Velocity				125	mph
Focal Length			10 (254)		Inch (mm)
Weight			11 (5)		Lbs (Kg)
Dimensions (Dia)			25.5 (648)		Inch (mm)


Wind Loading

	O	
PAWDA5	100 MPH	113
	125 MPH	177
	100 MPH w/	115
	½"Radial Ice	
w/Radome	100 MPH	75
	125 MPH	116
	100 MPH w/	78
	½"Radial Ice	

Page 2 PAWDA5





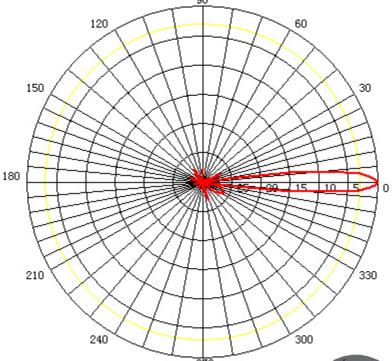

Notes:

- All shipments F.O.B. Bluffdale, UT 84065
- All antennas carry a 2 Year Warranty

Optional Fiberglass Radome

System Ordering:

DA58-29 29dBi 5.725GHz to 5.850GHz Parabolic Dish Antenna

DA57-28 28dBi 5.470GHz to 5.725GHz Parabolic Dish Antenna

DA53-28 28dBi 5.150GHz to 5.350GHz Parabolic Dish Antenna

DA5 RADOME Radome Kit for Parabolic Dish Antenna

For further information contact:

